

INSTALLATION PROJECTION RANGE

Innovation that exceeds expectations

April 2020

EPSON
EXCEED YOUR VISION

**TRUE
COLOURS**
Brighter, wild projection from Epson



Quality is in our DNA

Our uncompromising commitment to manufacturing quality and meticulous design detail add power to your presentations. Whether you choose our acclaimed lamp models or our latest laser projectors, you can rely on a level of quality that consistently leaves our competitors standing.

A history of world firsts

Building on the success of the world's first 12,000lm 3LCD laser projector¹ (EB-L1505U), the new EB-L25000U takes brightness to 25,000lm. The inorganic LCD panels and phosphor wheel have superior heat and light-resistance to deliver superb quality, new levels of reliability and bright, vibrant images for extremely long periods.



Native 4K panel

Our own 1.03-inch, native 4K panel delivers ultra-high definition image quality and beautiful output. The panel with its 6 μm pixel-pitch is designed by Epson and manufactured to the highest standards in our Japanese factories.



Built to last

Epson projectors are built to excel in challenging environments. The EB-L25000U delivers flawless performance even in dusty or smoky conditions because key components including the inorganic panels, inorganic phosphor wheel and laser bank are housed in a sealed structure. It also has a pipe frame and base plate structure to greatly improve casing durability.

3LCD panel




The power of research

We are committed to remaining world number one for projectors², with 70% of our Research and Development team of 1,100 engineers dedicated to projectors. We never stop working to find ways to give you the latest in quality, reliability and flexibility.



3LCD bolder, brighter colour

Our 3-chip solid-state optical engines deliver vibrant realistic images and optimise white balance and black colour matching for seamless blending. Equally high White and Colour Light Output means that images are not only extremely consistent, they are also three times brighter than 1-chip DLP projectors³, with no rainbow effect.

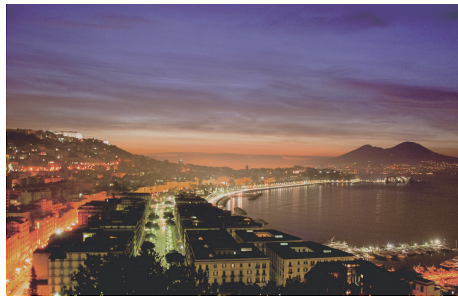

Conventional projectors – using 1-chip DLP technology



Epson 3LCD technology – three times brighter than competitor technology³




Consistent performance

Match brightness levels to your situation with more precise adjustment in increments of 1%, and maintain specific levels over a prolonged period of time with constant brightness mode⁴. This is useful in places like art galleries where consistent, accurate projections reflect the artist's vision.

Wider colour gamut

Achieve up to three times the colour gamut of 1-chip DLP projectors with Epson's HTPS panels. This core technology produces more vibrant colours with more accurate colour reproduction. You can also adjust hue, saturation and brightness for each colour in the RGB and CMY colour models.

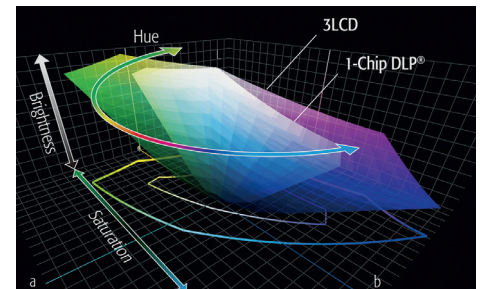

Breakthrough projector technology




Our technological innovations give you the power to project images that are simply better than the competition, and our latest laser projectors represent another big step forward in brightness, flexibility and reliability. Whatever your needs and budget, you have the creative freedom to entertain and inspire.

Flexible 360° installation

Enhance your presenting possibilities with 360° installation and project from any angle with no loss of brightness or image quality. Being able to install your projector just about anywhere in any orientation brings floors and ceilings into play so you can create images in surprising places that really capture attention.

Big impact projection

Panoramic and portrait projection are ideal for fashion shows and product launches. Create seamless multi-projector images on one giant screen or use portrait mode to bring out the best in digital signage and displays. Edge blending and scaling perfectly matches each image in terms of brightness and colour, with no visible joins.

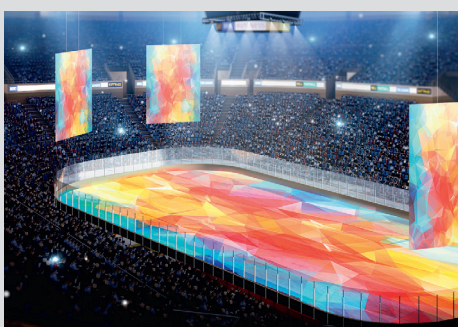



Built-in camera

Keep images consistent and maintenance to a minimum with the innovative built-in camera on our laser projectors. It detects screens that have become uneven or discoloured over time or notices subtle inconsistencies between multiple projectors and makes necessary adjustments to ensure smooth, accurate, uniform projections.

Simple control

Use features such as Epson Projector Management software and Epson iProjection software to monitor and control projectors, with fleet control across a network or on a web browser to keep track of up to 2,000 projectors. The latest models feature a newly designed OSD Control Pad function that shows a representation of lens conditions on a smart device.

Get connected

A wide range of connectivity to devices, memory storage and networks make it simple to get set up and integrated. This includes wireless networking and HDBaseT for Full HD audio and video control from up to 100 m away with a Category 5e/6 cable, ideal for large venues.

Store your settings

We design everything to make presenting as smooth and as simple as possible, including a lens memory feature which stores up to 10 settings including lens shift position, focus and projection sizes. This makes it easy to adjust the projector to match the aspect ratio of your content.



Lenses to match your vision

Choose the ideal lens for your presenting environment from a wide range of easily interchangeable, motorised options available for many models. These maximise quality and versatility and make it easier to use an existing ceiling or wall mount. The ultra-short-throw zero offset lens produces a 200-inch screen from only 1.5 m away, ideal for small spaces.



Projection without limits

Take your visual creativity to the next level with our breathtaking laser installation projectors. Enjoy unprecedented imaging power with the latest exclusive Epson technologies and impress audiences with the future of large scale presenting.

Transform the way your audiences look at corporate and higher education presenting, visitor attractions, museums and galleries and stunning digital signage at shopping centres, sports events and more. Our new laser projectors prove that we never stop taking the world of presenting forwards.

Superb image quality


Our laser projectors have redefined image quality, from the industry's first 12,000 lumen native 4K 3LCD projector⁵ to the world's brightest 3LCD projector with 25,000lm (EB-L25000U)⁶. This, combined with the improved texture and exceptional sharpness, clarity and detail of features like our 4K enhancement technology, keep us at the cutting edge of projectors.

Versatile lens options

Optional motorised lenses make it easy to find the perfect match for your subject and venue, while lens memory recalls settings for even faster set up. Choose from a wide range of lenses including an ultra-short-throw (UST) zero offset lens, which produces a 200-inch screen from only 1.5 m away. A choice of lenses also makes it simple to use an existing ceiling or wall mount.

Installation flexibility

Our laser projectors give you extra creative potential in the widest range of presenting venues. The EB-L25000U is particularly compact for easy installation, while all laser models offer 360° installation and wide lens shift. This means you can project in any direction and use extensive adjustment to create perfect images on just about any surface. Portrait projection is simple, and when you use multiple projectors to create an even bigger image, edge blending makes joins invisible⁴.

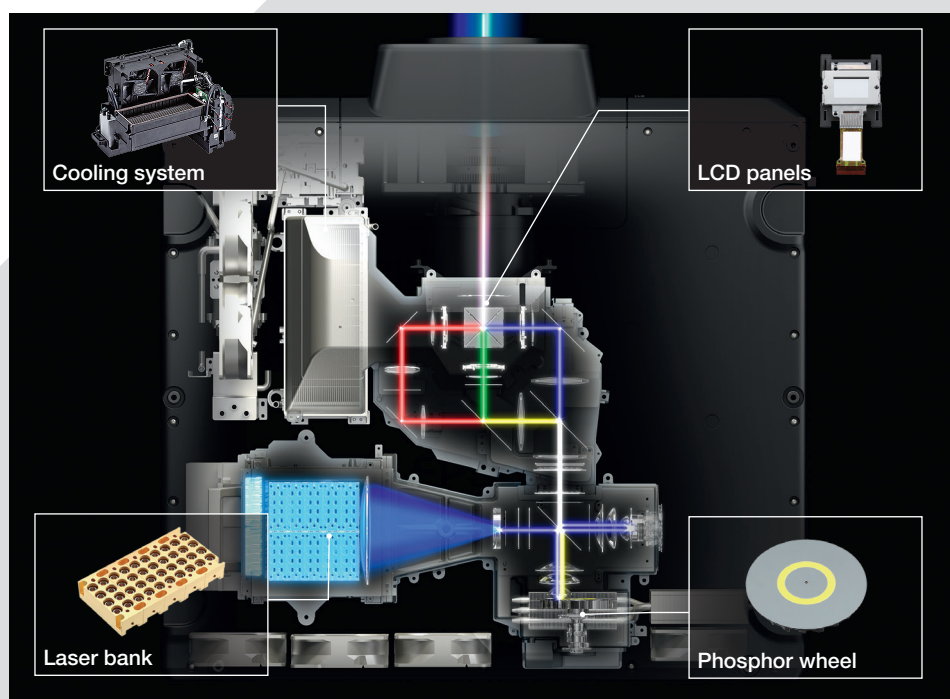

High reliability

Our newly developed inorganic phosphor wheel has superior light and heat-resistance and delivers excellent reliability. This works perfectly with our inorganic LCD panels to produce bright, vibrant images for extremely long periods. In fact, you can rely on a light source that is maintenance-free for 20,000 hours. Our projectors keep you working even in environments where dust and smoke may be common, and the specialised sealed structure of the EB-L25000U maximises image quality as well as reliability.



EB-L1000 Series

EB-L1060U, EB-L1065U, EB-L1070U, EB-L1075U, EB-L1490U, EB-L1495U, EB-L1505UH, EB-L1755U

Discover the difference with the projector range that introduced the world's first 12,000lm WUXGA 3LCD laser model¹ (EB-L1505U) and began a new era of installation projection.

Project truly stunning images easily and make a big impact at a very wide range of venues and events with presenting flexibility to match. With very high reliability and almost no maintenance these projectors can handle the busiest workloads.

– White and Colour Light Output from 6,000lm to 15,000lm



EB-L12000Q and EB-L20000U

EB-L12000Q , EB-L20000U

The L12000Q is the world's first 12,000 lumen native 4K⁵ 3LCD laser projector and the L20000U boasts 20,000 lumens of colour and white brightness² and WUXGA resolution. Both models share the same robust, compact chassis for simple integration into existing infrastructure. Featuring support for HDR, 360-degree installation flexibility, backward lens compatibility, swappable interface boards, tile assist, and a sealed optical and laser engine to protect from dust and smoke. These large venue laser projectors are ideal for rental and staging events, lecture halls, churches, and digital signage installations.



EB-L25000U

EB-L25000U

Create stunning visuals at any venue on a very big scale with a groundbreaking combination of 25,000lm brightness, beautiful images, extreme reliability and flexible presenting options.

This model is compact and lightweight but also highly durable and robust. Featuring a sealed optical system for enhanced performance in dusty or smoky environments and a combined water and air cooling system for enhanced reliability.

Large venue innovation

Harness the power of an installation projector with effortless simplicity. Our projectors offer outstanding projections with brilliantly simple setup, features and operation.

Our rugged and reliable projectors are ideal for permanent installations, but also surprisingly compact; meaning they fit seamlessly into any hard working rental fleet with changing venues or users.

The perfect image

Project a perfectly uniform image, enjoy flexible installation options and precision control with wide lens choices and adjustment, image optimisation and manual and automatic controls with lens shift and keystone correction. Add versatility with 360° installation.

For advanced projection applications, such as panoramas and curved surfaces on the entire façade of a building, projection mapping software will allow the creative projection of images onto curved surfaces and "bend" images around corners.

As easy as Miracast

Work quickly by broadcasting directly from your Android device or latest Intel computer onto the screen with the Miracast/WiDi Screen Mirroring protocol. What you see on the small screen is what you'll get on the big screen.




Get connected

Project your High-Definition content using a variety of HD devices via the HDMI input. Make fast connections in any venue and network setup with interfaces including HDMI, DVI, DisplayPort and component video.



Collaborative presenting

Multiple users can connect simultaneously to one projector using EPSON iProjection, with up to four user screens displayed at any one time. Present from two different sources simultaneously with the side-by-side split screen function. Compare and contrast information from a separate laptop or Epson Document Camera for 3D image projection.

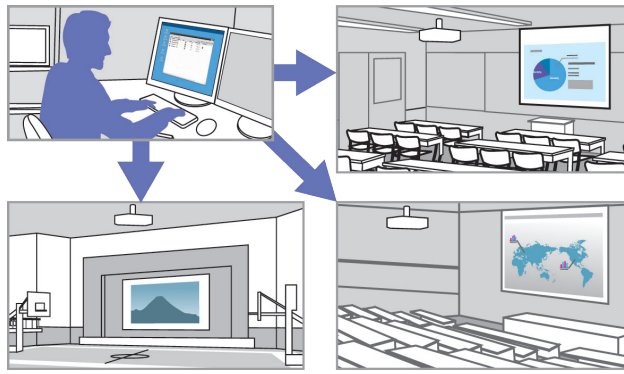

High reliability

The easily replaceable lamp and filter help to keep maintenance to a minimum, ensuring that your projections remain bright and clear for longer.

Take control

Take control with EPSON Projector Management software for real time monitoring and control, from PC-free and wireless presenting to centralised monitoring of your entire projector fleet.

Professional Tool

Epson Projector Professional Tool Software makes it easy to manage multiple Epson networked projectors. Its intuitive software automatically finds and displays all projectors on the network. It offers powerful projection features including geometric correction and Edge Blending. The software makes adjustments easy too - no need to figure things out using the remote control. Epson Projector Professional Tool software works with Windows 7/8.1/10 devices. It supports wired and wireless networks and can be easily downloaded from Epson.







Compatible with EB-L25000UNL, L20000UNL, L12000QNL, L1755UNL, L1505UHNL, L1505UNL, L1405UNL, L1300UNL, L12000UNL, L1100UNL, L1490UNL, L1495UNL, L1070UNL, L1075UNL, L1060UNL, L1065UNL






Content Management Software

Have the flexibility to customise content and features to fit your own use with Epson Projector Content Management Software. Gain complete control over your presentations by creating and scheduling playlists, adding visual effects, or applying your own remote short cuts and filters. The Epson Content Management Software enables users to quickly and easily sort and distribute content without any additional costs.

Compatible with EV-100, 105, EB-L510U, L610W, L610U, L615U, L1070UNL, L1075UNL, L1060UNL, L1065UNL








Model	EB-L510U	EB-L610W	EB-L610U/ EB-L615U	L1060U/L1065U	L1070U/L1075U	L1490U/L1495U
						
Resolution	WUXGA (1920 x 1200)	WXGA (1280 x 800)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
Native aspect	16:10	16:10	16:10	16:10	16:10	16:10
Light source	Laser	Laser	Laser	Laser	Laser	Laser
Colour light output (lumens) normal / eco	5,000/3,500	6,000/4,200	6,000 / 4,200	6,000 / 4,200	7,000 / 4,900	9,000 / 6,300
Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Laser life (hours) normal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect (standard lens)	1.35 - 2.20	1.35 - 2.20	1.35 - 2.20	1.44 - 2.33	1.44 - 2.33	1.57 - 2.56
Image size (diagonal, inches)	50 - 500	50 - 500	50 - 500	50 - 1,000	50 - 1,000	60 - 1,000
Zoom	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6
Vertical keystone Horizontal keystone	Manual ±30° Manual ±30°	Manual ±30° Manual ±30°	Manual ±30° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°
Lens shift (vertical / horizontal)	±50% / ±20% (Manual)	±50% / ±20% (Manual)	±50% / ±20% (Manual)	±67% / ±30% (Powered)	±67% / ±30% (Powered)	±60% / ±18% (Powered)
Speaker output	10W	10W	10W	N/A	N/A	N/A
Connectivity	HDBaseT, HDMI in x2, VGA out, VGA in, Audio out, Audio in x2 Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type A (Content playback), USB 2.0 Type B (Service Only)	HDBaseT, HDMI in x2, VGA out, VGA in, Audio out, Audio in x2 Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type A (Content playback), USB 2.0 Type B (Service Only)	HDBaseT, HDMI in x2, VGA out, VGA in, Audio out, Audio in x2 Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type A (Content playback), USB 2.0 Type B (Service Only)	HDBaseT, BNC in, HDMI in, DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type A (Optional Wireless Lan, Content playback) USB 2.0 Type B (service only)	HDBaseT, BNC in, HDMI in, DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type A (Optional Wireless Lan, Content playback) USB 2.0 Type B (service only)	HDBaseT, BNC in, HDMI in, DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type B (service only), HD-SDI, Art-Net
Audio connectivity	Stereo mini in x2 Stereo mini out	Stereo mini in x2 Stereo mini out	Stereo mini in x2 Stereo mini out	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out
Remote camera access	N/A	N/A	N/A	N/A	N/A	Available
Professional Tool	N/A	N/A	N/A	Available	Available	Available
Networking	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & built-in wireless LAN unit-	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & optional wireless LAN unit
Other features	Laser light source, fixed lens, manual zoom, focus & lens shift, USB direct content playback, content management software inclusion, 360° installation, portrait projection, constant brightness mode.			Laser Light Source, Interchangeable lens options including zero offset UST lens, Powered zoom, focus & lens shift, Lens Memory, 4K enhancement, 360° installation, Edge blending, Portrait projection, Constant brightness model, Content playback.		+ Integrated camera for image recalibration. (Content playback is not available)
Noise (dB) normal / eco	37 / 25	38 / 27	38 / 27	34 / 28	34 / 28 35 / 29	35 / 29
Weight (kg) excluding lens	8.5 (lens included)	8.5 (lens included)	8.5 (lens included)	19.0	19.0 19.5	19.5
Dimensions WxDxH (mm)	440 x 339 x 136	440 x 339 x 136	440 x 339 x 136	586 x 492 x 211	586 x 492 x 211	586 x 492 x 211
Power consumption (W) (normal / eco)	322 / 244	353 / 265	353 / 265	454 / 313	566 / 384 625 / 417	625 / 417
Power consumption (W) standby / comm. Off	0.30	0.30	0.30	0.50	0.50	0.50
Projector warranty	Please refer to Epson website for warranty details					

Model	EB-L1505UH	EB-L1755U	EB-L12000Q	EB-L20000U	EB-L25000U
					
Resolution	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	Native 4K (3840 x 2160)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
Native aspect	16:10	16:10	16:9	16:10	16:10
Light source	Laser	Laser	Laser	Laser	Laser
Colour light output (lumens) normal / eco	12,000 / 8,400	15,000 / 10,500	12,000 / 8,400	20,000 / 14,000	25,000 / 17,500
Contrast ratio	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1	2,500,000:1
Laser life (hours) normal / eco	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000	20,000 / 30,000
Throw ratio in native aspect (standard lens)	1.57 – 2.56	1.57 – 2.56	1.52 - 2.47	1.57 – 2.56	1.74 – 2.35
Image size (diagonal, inches)	60 – 500	60 – 500	60 – 1,000	60 – 1,000	100 – 1,000
Zoom	Optical x1.6	Optical x1.6	Optical x1.61	Optical x1.61	Optical x1.35
Vertical keystone Horizontal keystone	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±44° Manual ±30°	Manual ±45° Manual ±30°
Lens shift (vertical / horizontal)	±60% / ±18% (Powered)	±60% / ±18% (Powered)	±58% / ±15% (Powered)	±60% / ±18% (Powered)	±65% / ±30% (Powered)
Speaker output	N/A	N/A	N/A	N/A	N/A
Connectivity	HDBaseT, BNC in, HDMI in, DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type B (Service Only), HD-SDI, Art-Net	HDBaseT, BNC in, HDMI in, DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type B (Service Only), HD-SDI, Art-Net	HDBaseT, VGA out, VGA in, Ethernet interface, (100 Base-TX / Lockable etherCON 10 Base-T), RS-232C, USB 2.0 Type B (Service Only), Art-Net, HDMI/DVI*, Display port*, 12G SDI**	HDBaseT, VGA out, VGA in, Ethernet interface, (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type B (Service Only), Art-Net, HDMI/DVI*, Display port*, EtherCON-10, HD-SDI (digital), BNC in (analogue)	HDBaseT, BNC in, HDMI (HDCP 2.2), DVI in, VGA out, VGA in, Ethernet interface (100 Base-TX / 10 Base-T), RS-232C, USB 2.0 Type B (Service Only), HD-SDI, Art-Net
Audio connectivity	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out	N/A	N/A	N/A
Remote camera access	Available	Available	Available	Available	N/A
Professional Tool	Available	Available	Available	Available	Available
Networking	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & optional wireless LAN unit	LAN (RJ45) & built-in wireless LAN unit	LAN (RJ45) & built-in wireless LAN unit	LAN (RJ45) & Optional wireless LAN unit
Other features	Laser Light Source, Interchangeable lens options including zero offset UST lens, Powered zoom, focus & lens shift, Lens Memory, Integrated camera for image recalibration, 4K enhancement, 360° installation, Edge blending, Portrait projection, Constant brightness mode.		+ Fully sealed optical system, Interchangeable interfaces, Interchangeable lens options, tiling assist		+ Fully sealed optical system, Interchangeable lens options
Noise (dB) normal / eco	37 / 30	40 / 32	45 / 38	45 / 38	49 / 40
Weight (kg) excluding lens	22.0	22.3	51.4	49.8	66.6
Dimensions WxDxH (mm)	586 x 492 x 211	586 x 492 x 211	620 x 790 x 358.5	620 x 790 x 358.5	790 x 710 x 299
Power consumption (W) (normal / eco)	908 / 597	1,024 / 647	1,550 / 1,085	1,850 / 1,295	2,500 / 1,850
Power consumption (W) standby / comm. Off	0.50	0.50	0.50	0.50	0.50
Projector warranty	Please refer to Epson website for warranty details				

*Available as optional interchangeable interfaces

**only compatible with EB-L12000Q

EB-G7000 Series

Model	EB-G7800	EB-G7200W	EB-G7400U	EB-G7500U	EB-G7905U
					
Resolution	XGA (1024 x 768)	WXGA (1280 x 800)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)	WUXGA (1920 x 1200)
Native aspect	4:3	16:10	16:10	16:10	16:10
Light source	Lamp	Lamp	Lamp	Lamp	Lamp
Colour light output (lumens) normal / eco	8,000 / 6,400	7,500 / 6,000	5,500 / 4,400	6,500 / 5,200	7,000 / 5,600
Contrast ratio	50,000:1	50,000:1	50,000:1	50,000:1	50,000:1
Lamp life (hours) normal / eco	3,000 / 4,000	3,000 / 4,000	3,000 / 4,000	3,000 / 4,000	3,000 / 4,000
Throw ratio in native aspect (standard lens)	1.47 – 2.38	1.44 – 2.33	1.44 - 2.33	1.44 – 2.33	1.44 – 2.33
Image size (diagonal, inches)	50 – 300	50 – 300	50 – 300	50 – 300	50 – 300
Zoom	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6	Optical x1.6
Vertical keystone Horizontal keystone	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°	Manual ±45° Manual ±30°
Lens shift (vertical / horizontal)	±57% / ±30% (Powered)	±67% / ±30% (Powered)	±67% / ±30% (Powered)	±67% / ±30% (Powered)	±67% / ±30% (Powered)
Speaker output	10W	10W	10W	10W	10W
Connectivity	USB 2.0 Type A, USB 2.0 Type B (Service Only), RS-232C, Ethernet interface (100 Base-TX / 10 Base-T), Wireless LAN IEEE 802.11a/b/g/n (optional), VGA in, VGA out, DVI in, BNC in, HDBaseT, Stereo mini jack audio out, Stereo mini jack audio in (3x), HDMI (HDCP 2.2)*				
Audio connectivity	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out	Stereo mini in x3 Stereo mini out
Networking	LAN (RJ45) & Optional Wireless LAN unit	LAN (RJ45) & Optional Wireless LAN unit	LAN (RJ45) & Optional Wireless LAN unit	LAN (RJ45) & Optional Wireless LAN unit	LAN (RJ45) & Optional Wireless LAN unit
Other features	Portrait projection**, Powered zoom, Focus & Lens shift, Lens Memory, Split screen, Schedule function, Point & Arc correction, DICOM colour mode, Lens shift lock, Cable cover included				
Noise (dB) (normal / eco)	39 / 31	39 / 31	39 / 31	39 / 31	39 / 31
Weight (kg) excluding lens	12.9	12.9	12.9	12.9	12.9
Dimensions (W x D x H mm)	525 x 472 x 189	525 x 472 x 189	525 x 472 x 189	525 x 472 x 189	525 x 472 x 189
Power consumption (W) (normal, eco)	572 / 477	572 / 477	572 / 477	572 / 477	572 / 477
Power consumption (W) standby / comm. Off	0.3	0.3	0.3	0.3	0.3
Projector Warranty	Please refer to Epson website for warranty details				

*HDCP 2.2 is not applicable for the EB-G7800 and EB-G7200W.

**Portrait projection reduces lamp life to 2,000hrs.

Optional lens specification

Customise your installation projector with Epson's optional powered lenses. Available in a range of throw ratios to suit different venues, screen sizes and projector distances, create the best possible image quality and match your budget.

EB-L25000U

Lens type	Rear projection	Short throw	Wide zoom	Mid throw	Mid throw	Mid throw	Long throw	Long throw
Reference	ELPLR05	ELPLU05	ELPLW07	ELPLM12	ELPLM13	ELPLM14	ELPLL09	ELPLL10
Lens option								
Order number	V12H004R05	V12H004U05	V12H004W07	V12H004M0C	V12H004M0D	V12H004M0E	V12H004L09	V12H004L0A
Zoom ratio	N/A	1 – 1.21	1 – 1.37	1 – 1.35	1 – 1.52	1 – 1.50	1 – 1.50	1 – 1.50
Throw ratio	0.63 :1	0.90 – 1.09 :1	1.29 – 1.76 :1	1.74 – 2.35 :1	2.28 – 3.46 :1	3.41 – 5.11 :1	4.79 – 7.20 :1	6.73 – 10.45 :1
Screen size range (inches)	100 – 1,000	100 – 1,000	100 – 1,000	100 – 1,000	100 – 1,000	100 – 1,000	100 – 1,000	100 – 1,000
Lens shift	V: ±15% H: ±5%	V: ±55% H: ±25%	V: ±65% H: ±30%	V: ±65% H: ±30%	V: ±65% H: ±30%	V: ±65% H: ±30%	V: ±55% H: ±25%	V: ±55% H: ±25%

EB-G7000/EB-L1070 Series

Lens type	Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Mid throw	Long throw
Reference	ELPLX01/ ELPLX01W	ELPLU03S	ELPLU04	ELPLW05	ELPLW06	ELPLW08	ELPLM08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Lens option											
Order number	V12H004X01/ V12H004Y01	V12H004UA3	V12H004U04	V12H004W05	V12H004W06	V12H004W08	V12H004M08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Throw ratio	0.35:1	0.65 - 0.78:1	0.87 - 1.05:1	1.04 - 1.46:1	1.62 - 2.22:1	1.18 - 1.66:1	1.42 - 2.28:1	2.16 - 3.48:1	3.32 - 5.06:1	4.85 - 7.38:1	7.21 - 10.11:1
Screen size range (inches)	100 - 1,000	80 - 1,000	50 - 1,000	50 - 1,000	50 - 1,000	50 - 1,000	80 - 1,000	50 - 1,000	50 - 1,000	50 - 1,000	50 - 1,000
Lens shift	V: +17% H: ±10%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%	V: ±67% H: ±30%

Throw ratios of XGA model (EB-G7800NL) is not specified.

EB-L1490U/L1505UH/L1755U

Lens type	Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Long throw
Reference	ELPLX02	ELPLU03S	ELPLU04	ELPLW05	ELPLW06	ELPLW08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Lens option										
Order number	V12H004X02	V12H004UA3	V12H004U04	V12H004W05	V12H004W06	V12H004W08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Throw ratio	0.35:1	0.48 - 0.57:1	0.64 - 0.77:1	0.77 - 1.07:1	1.19 - 1.62:1	0.86 - 1.21:1	1.57 - 2.56:1	2.42 - 3.71:1	3.54 - 5.41:1	5.27 - 7.41:1
Screen size range (inches)	100 - 1,000	80 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000
Lens shift	V: +25% H: ±15%	V: ±24%* H: ±10%	V: ±60% H: ±18%	V: ±24% H: ±10%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%

*with 1080p signal (±32%)

EB-L20000U

Lens type	Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Long throw
Reference	ELPLX02	ELPLU03S	ELPLU04	ELPLW06	ELPLW08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Lens option									
Order number	V12H004X02	V12H004UA3	V12H004U04	V12H004W06	V12H004W08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Throw ratio	0.35:1	0.48 - 0.57:1	0.64 - 0.77:1	1.19 - 1.62:1	0.86 - 1.21:1	1.57 - 2.56:1	2.42 - 3.71:1	3.54 - 5.41:1	5.27 - 7.41:1
Screen size range (inches)	100 - 1,000	80 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000
Lens shift	V: +25% H: ±15%	V: ±24%* H: ±10%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%	V: ±60% H: ±18%

*with 1080p signal (±32%)

EB-L12000Q

Lens type	Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Long throw
Reference	ELPLX02	ELPLU03S	ELPLU04	ELPLW05	ELPLW06	ELPLW08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Lens option										
Order number	V12H004X02	V12H004UA3	V12H004U04	V12H004W05	V12H004W06	V12H004W08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
Throw ratio	0.34:1	0.46 - 0.56:1	0.62 - 0.75:1	0.74 - 1.04:1	1.15 - 1.57:1	0.83 - 1.17:1	1.52 - 2.47:1	2.34 - 3.59:1	3.42 - 5.23:1	5.09 - 7.16:1
Screen size range (inches)	100 - 1,000	80 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000	60 - 1,000
Lens shift	V: +23% H: ±10%	V: ±18% H: ±6%	V: ±58% H: ±16%	V: ±18% H: ±6%	V: ±58% H: ±16%	V: ±58% H: ±16%	V: ±58% H: ±16%	V: ±58% H: ±16%	V: ±58% H: ±16%	V: ±58% H: ±16%

Lens Compatibility Chart

Lens type	Ultra-short-throw	Ultra-short-throw	Short throw	Short throw	Wide throw	Wide throw	Wide throw	Mid throw	Mid throw	Mid throw	Mid throw	Long throw
Reference	ELPLX01	ELPLX02	ELPLU03S	ELPLU04	ELPLW05	ELPLW06	ELPLW08	ELPLM08	ELPLM15	ELPLM10	ELPLM11	ELPLL08
Order number	V12H004X01	V12H004X02	V12H004UA3	V12H004U04	V12H004W05	V12H004W06	V12H004W08	V12H004M08	V12H004M0F	V12H004M0A	V12H004M0B	V12H004L08
EB-G7800	√	-	√	√	√	√	√	√	√	√	√	√
EB-G7200W	√	-	√	√	√	√	√	√	√	√	√	√
EB-G7400U	√	-	√	√	√	√	√	√	√	√	√	√
EB-G7500U	√	-	√	√	√	√	√	√	√	√	√	√
EB-G7905U	√	-	√	√	√	√	√	√	√	√	√	√
EB-L1060U	√	-	√	√	√	√	√	√	√	√	√	√
EB-L1065U	√	-	√	√	√	√	√	√	√	√	√	√
EB-L1070U	√	-	√	√	√	√	√	√	√	√	√	√
EB-L1075U	√	-	√	√	√	√	√	√	√	√	√	√
EB-L1490U	-	√	√	√	√	√	√	-	√	√	√	√
EB-L1495U	-	√	√	√	√	√	√	-	√	√	√	√
EB-L1505UH	-	√	√	√	√	√	√	-	√	√	√	√
EB-L1755U	-	√	√	√	√	√	√	-	√	√	√	√
EB-L12000Q	-	√	√	√	√	√	√	-	√	√	√	√
EB-L20000U	-	√	√	√	-	√	√	-	√	√	√	√

The Best Projectors Deserve The Best Care.

At Epson, we're committed to excellence. We pride ourselves on giving you projectors that will deliver unsurpassed image quality and colour precision and we want that standard to continue.

We realise how important projector technology can be for your operations, and that's why we offer a range of great service packs to ensure that things continue running smoothly.

These service packs give you extra benefits over and above your standard warranty. And perhaps even more importantly, they provide real reassurance.

Why you should go with Epson CoverPlus

Cost Control

Avoid unexpected costs and save money over the life of your projector. Often, a single service can cost more than an Epson CoverPlus service pack. Plus, you won't need to invest in inventory spares.

Reduce Downtime

Get your projector back up and running in no time with our fast, prioritised on-site service & support.

More Value

An Epson service pack means that your projector will be properly serviced, extending the product's life and making sure you get the best value. You'll also be able to better plan the timing of replacement products.

Epson Experts

Enjoy the satisfaction and reassurance of having your product serviced by skilled, Epson-trained technicians.

Match Your Leasing Term

Most high-end projector equipment is financed over a 3 to 5 year term. Epson CoverPlus ensures that the equipment is fully covered during that period.

Flexible Support

Our support is available for home-based workers and customers in remote locations.

Wide Range Of Support Options

Choose the Epson CoverPlus service pack that best suits your needs. We can even customise a service plan just for you.

Compare the benefits of Epson CoverPlus:

	Standard Warranty	Epson Cover
Coverage Period	Up to 4 Years	Up to 5 Years
Coverage Type	Return to base	Return to base; Rapid exchange or On-site
Parts	Yes	Yes
Labour	Yes	Yes
Phone response (within business hours)	24-48 hrs of Epson being notified	8 hrs of Epson being notified
Priority 1st Queue	No	Yes
Dedicated unlimited telephone support	Yes	Yes
Dedicated unlimited email support	Yes	Yes

Accessories for a wide range of applications

Every environment and every presentation is different, so we offer a wide range of accessories to meet your needs. From filters, lamps and ceiling mounts to screens and lenses, we make it easy to tailor your projector package to match your environment or audience.



Epson projector lenses

Customise your installation projector with Epson's optional lenses. Available in a range of throw ratios to suit different venues, screen sizes and projector distances, different lenses give you the option to maximize image quality without breaking your budget.

Optional lenses are available for the EB-G7000 Series, EB-L10000 Series, EB-L20000 Series and EB-L25000.



Epson genuine lamps

Guarantee the best, brightest and most consistent images for longer with genuine Epson lamps. They are manufactured and shipped under rigorous quality control systems that guarantee the best image quality, maximise reliability, minimise maintenance and ensure ongoing comprehensive warranty cover.



HDBaseT transmitter ELPHD01

Extend your reach even further with this wireless video/audio extender. It's easy to install and has three inputs: HDMI, LAN and RS-232 for output into a CAT-5/6 cable.



Wireless LAN adapter ELPAP10

Make fast, secure wireless presentations via EasyMP Network Projection or Epson's iProjection app with the help of this easy installation USB adapter.



Ceiling mount

Fit your projector perfectly to your venue and ensure flexibility, safety and security with our tailor-made ceiling mounts.

Ceiling mounts are available for the EB-L1000 Series and EB-G7000 Series (ELPMB22, ELPMB47 and ELPMB48).



Carry Handle

Attach a genuine Epson carry handle to add convenience to large venue installation.

Carry handle (ELPMB49) for EB-L25000U is available.



Better Products for a Better Future™

¹The EB-L1505U was the first and only 12,000lm WUXGA 3LCD laser projector on the market as of December 2015.

²Survey conducted by Futuresource Consulting Limited for the period from 2001 to 2019.

³Colour brightness (colour light output) in brightest mode, measured by a third-party lab in accordance with IDMS 15.4. Colour brightness will vary depending on usage conditions. Top-selling Epson 3LCD projectors versus top-selling 1-chip DLP projectors based on NPD sales data for May 2017 – April 2018. For more information please visit www.epson.com.au/CLO or www.epson.co.nz/CLO

⁴Not available on all products, please check specification on pages 10–12.

⁵EB-L12000Q is the world's first 12,000 lumen native 4K 3LCD laser projector on the market as of February 2018.

⁶Brightest 3LCD projector as of September 2016. Some short-throw and ultra-long-throw lenses will not produce 25,000lm.